


Specifications

Model	BTU	Width		Height		Depth		Glass
		Actual	Framing	Actual	Framing	Actual	Framing	
LVX38N	32,000	57 5/16	53 13/16	39 11/16	74	16 3/16	18	41 1/8 X 18 5/8
LVX38N2	32,000	57,5/16	53 13/16	39 11/16	74	16 3/16	16 3/16	41 1/8 X 18 5/8
LVX50N	38,000	69 5/16	65 13/16	39 11/16	74	16 3/16	18	54 1/8 X 18 5/8
LVX50N2	38,000	69 5/16	65 13/16	39 11/16	74	16 3/16	16 3/16	54 1/8 X 18 5/8
LVX62N	44,000	81 5/16	77 13/16	39 11/16	74	16 3/16	18	66 1/8 X 18 5/8
LVX62N2	44,000	81 5/16	77 13/16	39 11/16	81	16 3/16	16 3/16	66 1/8 X 18 5/8
LVX74N	50,000	93 5/16	89 13/16	39 11/16	74	16 3/16	18	78 1/8 X 18 5/8
LVX74N2	50,000	93 5/16	89 13/16	39 11/16	81	16 3/16	16 3/16	78 1/8 X 18 5/8

Minimum Venting Requirements


3.1 typical venting installation

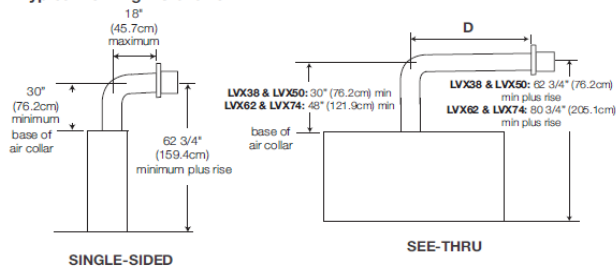

	LVX38	LVX50	LVX62	LVX74
D	40"	46 1/2"	52 1/2"	58 1/2"

special vent installation (periscope termination)

Use the periscope kit to locate the air termination above grade. The periscope must be installed so that when final grading is completed, the bottom air slot is located a minimum 12" (30.5cm) above grade. The maximum allowable vent length is 10' (3m).

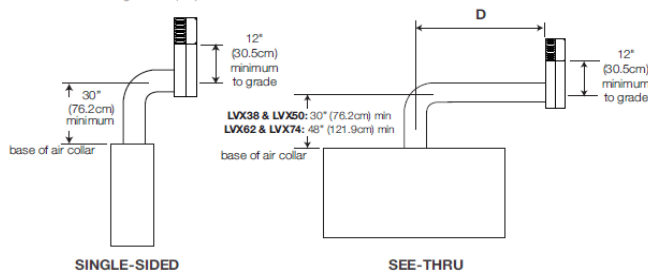


	LVX38	LVX50	LVX62	LVX74
D	40"	46 1/2"	N/A	N/A

Minimum Framing Clearances

Before framing your appliance, determine vent requirements before deciding the final location of the appliance. After rough framing, place the appliance in its final position.


single-sided

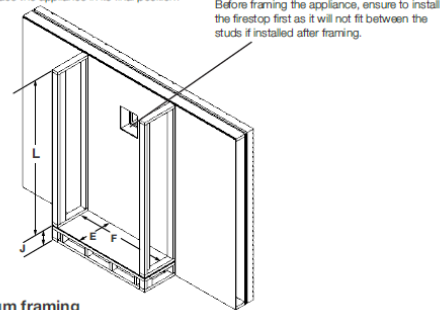

minimum framing

Ref	LVX38	LVX50	LVX62	LVX74
E	18" (45.7cm)	18" (45.7cm)	18" (45.7cm)	18" (45.7cm)
F	53 13/16" (136.7cm)	65 13/16" (167.2cm)	77 13/16" (197.6cm)	89 13/16" (228.1cm)
J	Optional - Appliance does not need to be elevated above floor			
*L	74" (188cm)	74" (188cm)	74" (188cm)	74" (188cm)

see-thru

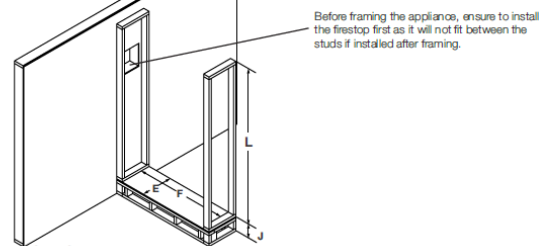


minimum framing

Ref	LVX38	LVX50	LVX62	LVX74
E	16 3/16" (41.1cm)	16 3/16" (41.1cm)	16 3/16" (41.1cm)	16 3/16" (41.1cm)
F	53 13/16" (136.7cm)	65 13/16" (167.2cm)	77 13/16" (197.6cm)	89 13/16" (228.1cm)
J	Optional - Appliance does not need to be elevated above floor			
*L	74" (188cm)	74" (188cm)	81" (205.7cm)	81" (205.7cm)

*Minimum enclosure height may be higher depending on venting configuration (See minimum distance to combustibles)

Combustible Mantel Clearances




Installing a mantel between this appliance and electronics or other materials that may be sensitive to heat, will reduce the effect of direct heat on them. Follow mantel height and depth instructions for proper clearance information.

A non-combustible mantel is considered a non-combustible protrusion, see protrusion section.


Electronics, picture frames, decor, or other wall-mounted objects must be 6" below the air outlet opening and 6" above the finishing flange.

Dynamic Heat Control™
All outlet opening
Ceiling



Appliance Location

5.1 minimum framing dimensions

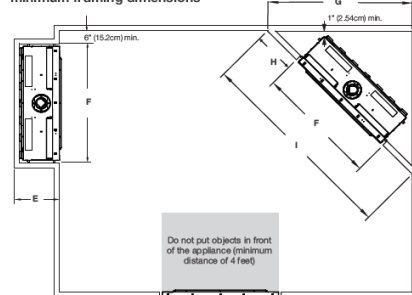


minimum

	LVX38	LVX50	LVX62	LVX74
E	18" (45.7cm)	18" (45.7cm)	18" (45.7cm)	18" (45.7cm)
F	53 13/16" (136.7cm)	65 13/16" (167.2cm)	77 13/16" (197.6cm)	89 13/16" (228.1cm)
G	63 3/4" (162cm)	72 1/4" (183.5cm)	80 11/16" (205cm)	89 1/4" (226.6cm)
H	18 3/16" (46.2cm)	18 3/16" (46.2cm)	18 3/16" (46.2cm)	18 3/16" (46.2cm)
I	90 3/16" (229cm)	102 3/16" (259.5cm)	114 1/8" (289.9cm)	126 1/8" (320.4cm)

Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.

Dimensions

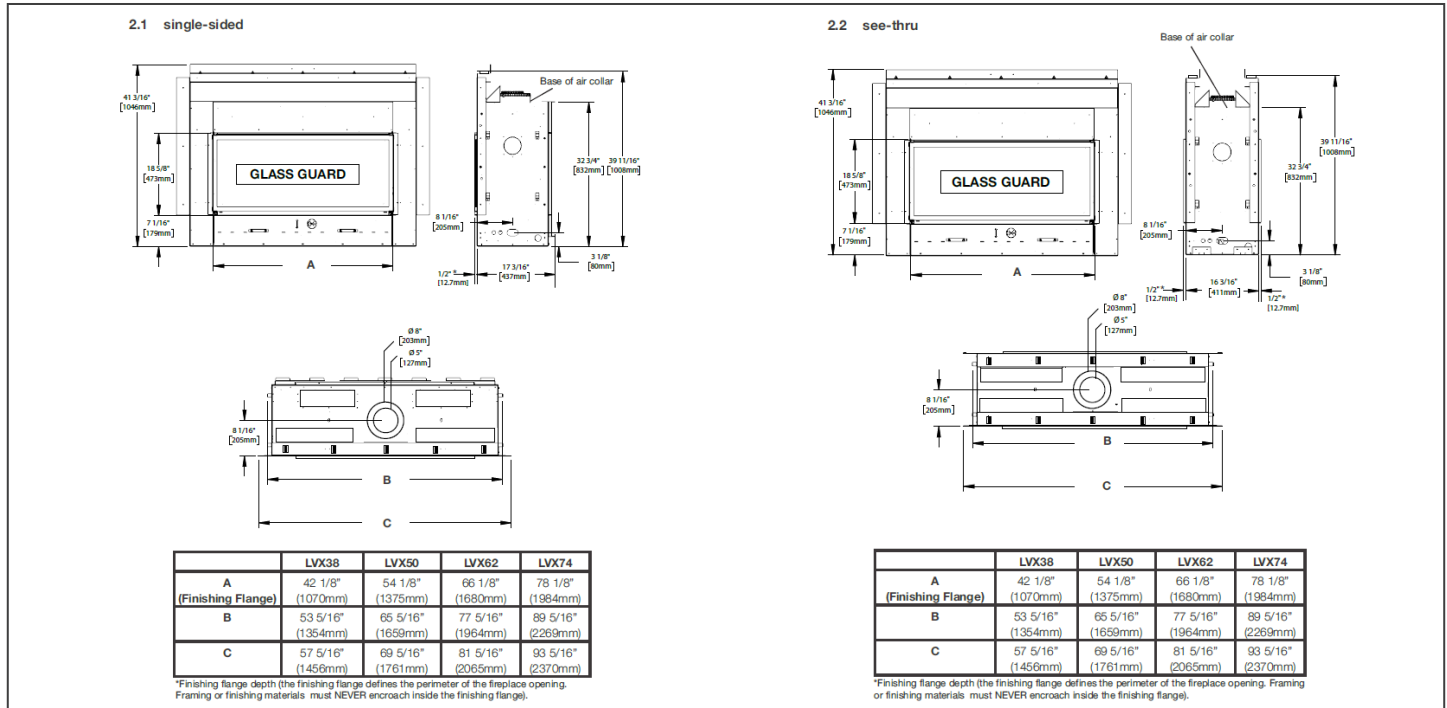

Wall Penetration

